



TRANSFER PUMP TUP 3-1,5 C / CL

Mineraloil, Fuel ▪ Electric Drive 400 V

DIN 14 424 approved ▪ certificate PVR 250/1/77



Pressure measuring unit

PUMPE:

maintenance-free

Charged dry-running safe

Dry weight 56 kg

Note: design type „CL“
with 230 V-plug EEx



Self-priming up to 8,4 m

Solids passage $\varnothing$ 4 mm

Q max. 600 l/min.

Complete unit EX-proof acc. to protection class EEx II 2G c IIB T3 in compl. with RL 94/4/EG (ATEX)
Examination certificate IBEU03ATEXB036X

APPLICATION AREA:

Within hazardous zones 1 and 2 for
non-aggressive inflammable liquids.

Ambient temperature T_a : $-20^{\circ}\text{C} \leq T_a \leq +60^{\circ}\text{C}$

Liquid temperature T_{FM} : $-20^{\circ}\text{C} \leq T_{FM} \leq +40^{\circ}\text{C}$


Liquid density: $\leq 1,1 \text{ kg/dm}^3$

ph-limitations: 5-8

FLOW RATE:

Q l/min	bar (p)
600	0,5
500	1,0
420	1,25
320	1,5
0	2,0

Förderdruck p bar

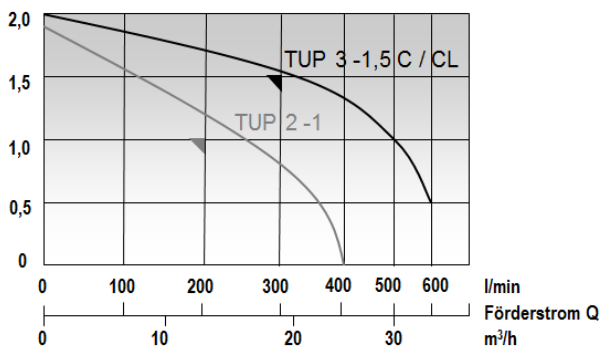

Q l/min at h m (Water column), valid for $\rho = 1 \text{ kg/dm}^3$ and kinematic viscosity $\eta = 1 \text{ mm}^2/\text{s}$.
Flow rate and efficiency DIN 1444, Accuracy level III.

CHARACTERISTICS:

Pump type:	3~400 V Three-phase AC 50 Hz
Power P_1 / P_2 :	3,0 kW / 2,5 kW
Rated current:	4,55 A
Shaft speed:	2875 U/min.
Total weight:	56 kg
Dimensions:	L 62 x B 39 x H 46 cm
Connections:	G 2"
Discharge Conn.:	Coupling acc. to DIN 14 307-C
Solid passage:	$\varnothing$ 4 mm
Cable:	H 07 RN-F 5G1,5 (1,5 m)
Plug:	EN CEE 16A 5-pole EEx

MATERIALS:

Pumpe housing:	Aluminum alloy acc. to DIN EN 1706*
Tubular frame:	Coated steel
Impeller:	Brass CuSn acc. to DIN EN 1982
Diffuser:	Special cast iron acc. to DIN EN 1561
Gaskets:	Mineral oil resistant elastomer
Mechanical seal:	Carbon / Ceramics
	*sea water resistant



powerful
robust
reliable

MAST PUMPEN GmbH
Pump manufacturer
Mörikestr. 1 ▪ D-73773 Aichwald

+49 711 936704-0
info@mast-pumpen.de
www.mast-pumpen.de

Subjects to change. V_01/17